





SAMAX ENTERPRISES

True Roofing Value Roofing Everything

THE UPVC ROOFING COMPANY

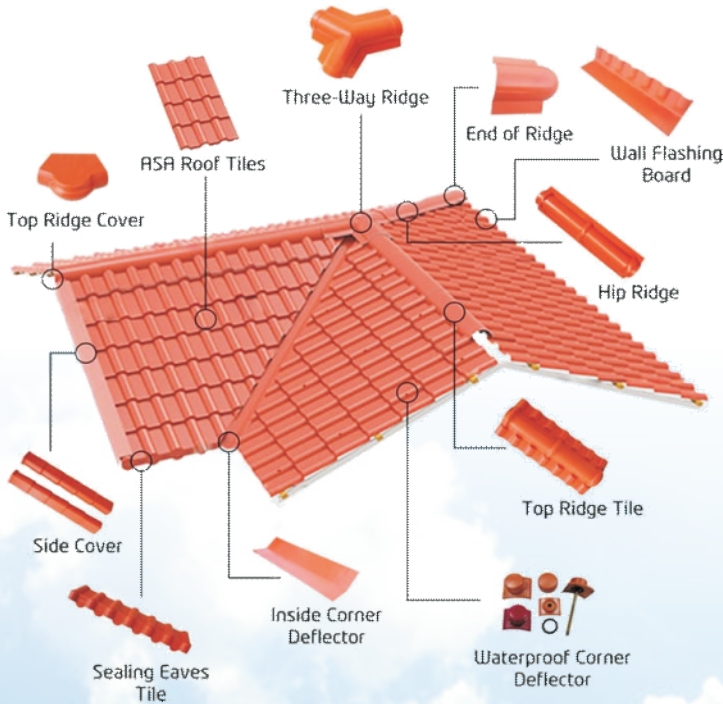

Length : 6.5', 8', 10', 12.2', 14.3', 16.5', 18', 19.4' Feet

Width : 3.5' Feet

Colour : **Orange** **Green** **Brown** **Grey**






Samax Enterprises in collaboration with Dion Incorporation have introduced and marketed this new roofing technology of UPVC (Un Plasticized Polyvinyl chloride) corrugated three layer Roofing sheets popularly known as Plastic Roofing Sheet under the brand name DION, in the year 2011.

DION UPVC sheets are manufactured at its plant at Lodhika - Rajkot, a fully developed industrial estate near Rajkot. The manufacturing facility is equipped with latest state-of-the-art automated machineries. Enabling us to offer the best quality, UPVC sheets, and at the most competitive prices.

Dion UPVC sheets are optimum choice for roofing and cladding. UPVC roofing sheets is the best replacement to conventional asbestos, metal G.I. sheets, fiberglass sheets and ceramic tile sheets, considering its property of heat insulation, sound insulation, water resistance, chemical and alkali resistance, corrosion proof, fire retardant, eco-friendly. They are easy to install and move, light weight as well as cost effective in installation. Not only that, but it can save construction cost up to 50%.

MATERIAL STRUCTURE






1. Surface Layer-The material is ultra-weather resin, to block the solar ultra violet and reduce the coefficient of heat conductivity, ensure product durability and resistance to chemical corrosion.
2. Surface Intermediate Layer-contains Multi foam giving to the material light weight and improved sound and thermal insulating properties.
3. Underlying layer-For Just a good material toughness special to ensure the strength at the same time, increase the rigidity and light illumination.

Three kinds of different materials to give the product their own features and the organically combined to make a new generation of heat insulation uPVC sheet to solve the product durability, corrosion resistance, small rigidity, a sense of space and aesthetics issues.

Note: Length can be customized as per customers required on bulk order only. (Trapezoidal wave & round wave profile)

Weight (Approx): -1.5mm-2.6kg/sq.mtr, 2mm-3.4 kg/sq.mtr, 2.5 mm-4Kg/sq.mtr, 3mm-5.1kg/sq.mtr, 3.5 mm-5.8kg/sq.mtr, 4 mm-6.3kg/sq.mtr,

Purlin span:- 1.5mm < 1.5 feet, 2mm < 2 feet, 2.5 mm < 2.5 feet, 3mm < 3 feet, 3.5mm < 3.5 feet, 4.0 mm < 3.5 feet (**Slope required minimum 25° Degree**)

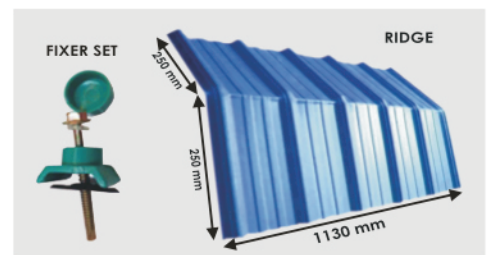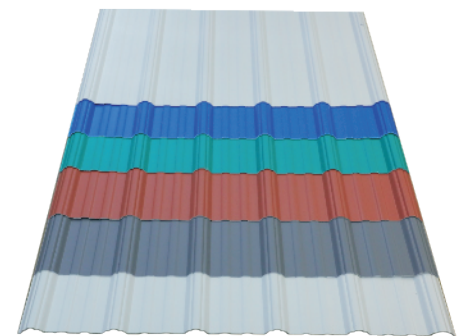

↑ 125000 sq.ft. (approx) project done in the year 2011 **Galvanizing Plant**
3.0mm Thickness for Roof
2.00mm Thickness for Wall



↑ After 10 Year, 2021
No Corrosion & No Other damages




Upvc Roofing Sheet installed in Vapi Chemical Zone Since 2012

Euro UPVC Gutter drainage systems

Modern, architecturally designed homes require a gutter with simple, clean and refined lines. EURO GUARD HYSQUARE rainwater gutter features the latest cutting edge styling. It has a large water carrying capacity and has extra thickness as well as reinforcement rib for additional strength. EURO GUARD HYSQUARE gutter has a high front that provides a visual cover to the end of roof sheets and tiles. Its square front delivers a neat finish to any building.

Size : 160 mm - 3 mtr Length, 200 mm - 5 mtr Length




Gutter



Centre joint



Centre Drop



Corner Drop



Corner



End Drop




End Cap




PVC Clamp



Square Pipe



Square Elbow 45°



Square Elbow 90°




Square Clamp



Leaf Guard




Pipe Coupling




Square Adaptor

Industrial Turbo Ventilator

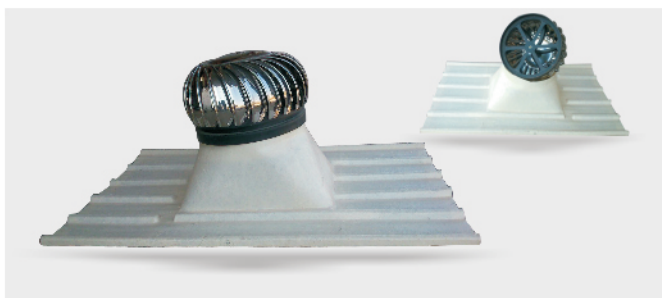


Stainless Steel Double Fan

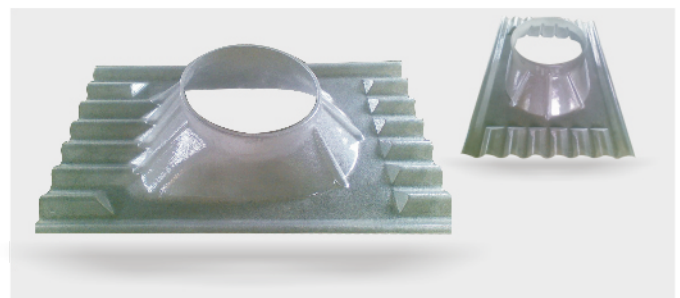

Polycarbonate Base










FRP Industrial rain Gutter

- ❖ Good Corrosion and Weather Resistance
- ❖ High Physical and Mechanical Strength
- ❖ Highly Durable & High Strength to weight ratio
- ❖ Can be Customized as per Customer Requirement
- ❖ Lower thermal conductivity and Good adaptability & dimensional stability with UV resistance and Flexibility in design
- ❖ Light in Weight and hence easy to handle and install
- ❖ Ease of Maintenance with Zero Downtime
- ❖ Economical & cost effective

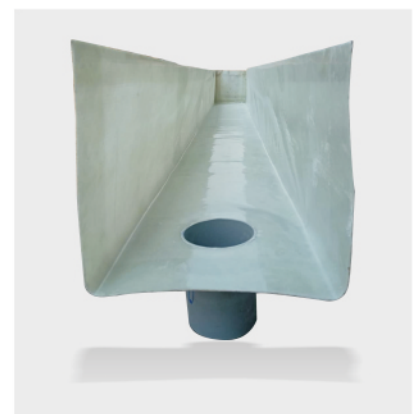

Our Quality Product's have life more then 10 years*

Other Roofing Product



📍 Office: Plot No. 146/2, Shop No. 3/4, Jeel Industries Compound, 2 Phase, GIDC Vapi - 396195.

🏠 Godown: Plot No. 68, Sai Veer Industrial Park, At. Karwad, Ta.Vapi, GIDC Vapi

✉️ samaxcoolingproducts@gmail.com/samaxroof@gmail.com

🌐 www.samaxroof.com

☎️ 9712881100

We Provide All Kind of Industrial Roofing Materials